

AUTOMATIC MOVABLE ROAD DIVIDER USING IOT

P. Venkateswara Reddy, P.Divya, P. Poojitha, D.Naga Akash, P.Kishan Kumar,
Y.Uday Chandra

#1#2#3#4#5#6 B.Tech with Specialization of Computer Science and Engineering in Visvodaya
Engineering College, Kavali.

Abstract: This paper presents a novel Smart Road Divider system leveraging IoT technologies for adaptive traffic management in urban environments. By integrating an array of infrared sensors within road dividers and employing an Arduino Uno microcontroller for real-time data processing, the system autonomously adjusts divider positions based on dynamic traffic patterns. Utilizing motors for physical movement, indicators for visual notifications, and optional buzzers for audible alerts, the system optimizes lane allocation to minimize congestion, reduce travel times, and enhance fuel efficiency. Seamless integration with existing traffic infrastructure ensures effective coordination, while rigorous testing and ongoing maintenance ensure reliability and adaptability. Offering a proactive approach to traffic management, this system represents a significant step towards smarter, more efficient urban transportation systems.

Keywords: Smart Road Divider, IoT, Adaptive Traffic Management, Infrared Sensors, Arduino Uno, Lane Allocation, Urban Traffic.

I. Introduction

In urban areas, navigating through traffic congestion often feels like an unavoidable part of daily life. As cities grow and populations increase, traditional methods of managing traffic struggle to keep up with the demand. This leads to frustrating delays, wasted fuel, and increased pollution. One contributing factor to congestion is the static nature of road dividers, which fail to adapt to changing traffic patterns. Typically, road dividers separate lanes for continuous and approaching traffic, but they do not adjust based on which direction has heavier traffic flow. This inefficiency not only causes inconvenience to drivers but also contributes to overall road congestion. To address these challenges, we propose a solution: a Smart Road Divider system that utilizes Internet of Things (IoT) technologies to dynamically

adjust divider positions based on real-time traffic data. By embedding an array of infrared sensors within road dividers and connecting them to an Arduino Uno microcontroller, the system can detect traffic flow and autonomously reposition dividers as needed. This adaptive approach allows lanes to be reallocated to accommodate varying traffic demands, optimizing road space utilization and enhancing traffic flow efficiency.

The implementation of this system offers numerous benefits beyond simply reducing congestion. By minimizing delays and streamlining traffic flow, it can significantly reduce travel times for commuters, leading to improved productivity and quality of life. Additionally, by optimizing lane allocation, the system can help decrease fuel consumption and vehicle emissions,

contributing to environmental sustainability. Furthermore, the Smart Road Divider system represents a step towards smarter, more responsive urban transportation systems, laying the foundation for future innovations in traffic management. In the subsequent sections of this paper, we delve deeper into the existing traffic management methods and their limitations, followed by a detailed discussion on the proposed Smart Road Divider system architecture, components, and operation. We then present the implementation details, including hardware setup, software algorithms, and integration with existing traffic infrastructure. Moreover, we provide insights into the system's performance through rigorous testing and validation in both simulated and real-world environments. Finally, we analyze the results obtained and discuss the implications of our findings, highlighting the potential impact of the Smart Road Divider system on urban traffic management.

II. Literature Survey

Several studies have addressed traffic management and control systems, aiming to enhance efficiency and reduce congestion in urban environments. Vidhya and Banu (2014) introduced a density-based traffic signal system, leveraging vehicle density to adjust signal timing and optimize traffic flow. Khanke and Kulkarni (2014) proposed a technique for road traffic analysis using image processing, focusing on identifying traffic patterns and congestion areas. Sundar et al. (2015) developed an intelligent traffic control system integrating congestion control, ambulance clearance, and stolen vehicle detection, emphasizing the importance of comprehensive solutions for urban traffic management.

Choudekar et al. (2014) presented a real-time traffic light control system based on image processing, offering dynamic signal adjustments to accommodate varying traffic conditions. Bhusari (2015) explored traffic control using Raspberry Pi, highlighting the potential of low-cost computing platforms for traffic management applications. Lokesh (2014) introduced an adaptive traffic control system utilizing Raspberry Pi, emphasizing the adaptability and scalability of such systems for diverse traffic scenarios.

Djahel (2015) focused on reducing emergency services response time in smart cities through an advanced adaptive and fuzzy approach, underscoring the significance of efficient traffic management for emergency vehicle clearance. Kiokes (2015) developed an integrated wireless communication system for connecting electric vehicles to the power grid, addressing the emerging challenges of electric vehicle integration into urban transportation systems.

Additionally, studies such as "Movable Traffic Divider: A Congestion Release Strategy" (2017) have explored innovative approaches to alleviate congestion, highlighting the potential of dynamic traffic management solutions. However, existing systems often face limitations such as scalability, adaptability, and integration with existing infrastructure.

III. Drawbacks Identified

Despite the advancements in traffic management systems, several drawbacks persist. Many existing systems lack adaptability to dynamically changing traffic conditions, relying on fixed signal timing or predetermined control algorithms. Moreover, the integration of emerging

technologies like image processing or wireless communication into practical traffic control systems remains limited.

IV. Proposed System

To address these limitations, we propose a Smart Road Divider system that leverages IoT technologies to dynamically adjust divider positions based on real-time traffic data. By incorporating an array of infrared sensors within road dividers and utilizing an Arduino Uno microcontroller for data processing, the system autonomously reallocates lanes to optimize traffic flow. This adaptive approach offers scalability, adaptability, and integration with existing traffic infrastructure, promising improved efficiency and reduced congestion in urban environments. Through rigorous testing and validation, the proposed system aims to offer a practical solution for enhancing traffic management and reducing congestion in urban areas.

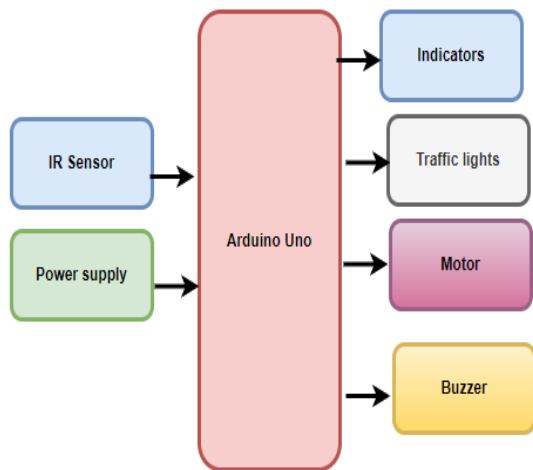


Fig 1: Block diagram of the proposed system

V. Components used and its description

Infrared (IR) Sensors:

Description: These sensors are embedded within the road dividers to detect the presence and movement of vehicles. They emit and detect infrared radiation, allowing them to sense changes in their surroundings.

Function: IR sensors serve as the primary input devices, providing real-time data on traffic flow to the system.



Fig 1: IR sensor

Arduino Uno Microcontroller:

Description: The Arduino Uno is a microcontroller board based on the ATmega328P chip. It provides the computational power and control logic for the system.

Function: The Arduino Uno processes the data received from the IR sensors and executes algorithms to determine the optimal positioning of the road dividers based on traffic conditions.

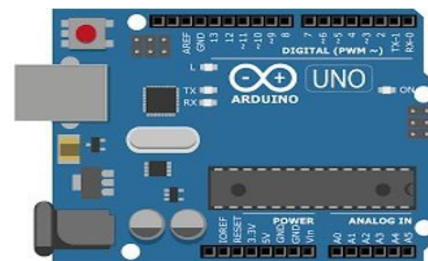


Fig 2: Arduino uno

Motors:

Description: Motors are electromechanical devices that convert electrical energy into mechanical motion.

Function: Motors are used to physically move the road dividers, adjusting their positions according to the instructions received from the Arduino Uno. They enable dynamic lane allocation based on real-time traffic data.



Fig 3: Motor

Indicators (LEDs):

Description: Light-emitting diodes (LEDs) are semiconductor devices that emit light when an electric current passes through them.

Function: LEDs are used as visual indicators to notify drivers about lane changes or altered traffic patterns. They provide clear visual cues to guide drivers through the modified road layout.



Fig 4: LEDs

Buzzer:

Description: A buzzer is an audio signaling device that produces sound when an electrical current is applied.

Function: The buzzer can be used to provide audible alerts or warnings to drivers, such as when lane changes are occurring or when the system is in operation.



Fig 5: Buzzer

Motor Driver

Description: A motor driver is an electronic device or circuit that controls the speed, direction, and operation of an electric motor. It acts as an interface between the microcontroller or control system and the motor, providing the necessary power and control signals to drive the motor efficiently.

Function: To drive the motor for moving dividers direction



Fig 6:Motor driver

VI. Working algorithm

Initialization: Initialize the system components, including IR sensors, motor driver, indicators, traffic signals, and buzzer.

Set initial divider position and signal states.

Sensor Data Acquisition: Continuously monitor the IR sensors to detect traffic flow in each lane.

If sensor data indicates high traffic density in one lane: Activate indicators to signal lane change.

Activate red signal for that lane to halt traffic flow.

Start moving the divider slowly to allocate an additional lane to the congested side.

Motor Control: Utilize the motor driver to control the movement of the road divider.

Gradually adjust the position of the divider towards the less congested side.

Ensure smooth and controlled movement to prevent disruption to traffic flow.

Alert Generation: If necessary, activate the buzzer to provide audible alerts to drivers about the lane change and divider movement.

Maintain visual cues through indicator lights to guide drivers through the modified road layout.

Adaptive Traffic Management: Continuously monitor traffic conditions through IR sensors.

Adjust divider position and traffic signals dynamically based on real-time traffic data.

Ensure safe and efficient traffic flow by adapting to changing congestion levels.

VII. Results

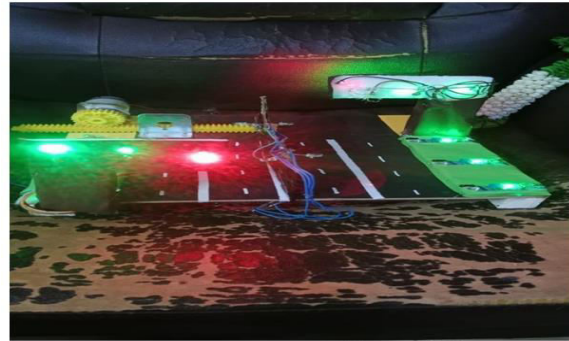


Fig 7: Figure Showing the Developed Road Divider System

The developed road divider system is depicted in a detailed figure showcasing its physical components, including the road dividers, IR sensors, motor driver, and other associated hardware. The figure provides a visual representation of how the system is implemented in a real-world setting, illustrating its practicality and functionality. This figure serves as a visual reference for understanding the physical implementation of the Smart Road Divider system and demonstrates its feasibility for deployment in real-world traffic scenarios.



Fig 8: User Interface Showing Divider Position (Right, Normal, and Left)

The user interface displays the current position of the road dividers, providing visual feedback to users or traffic operators.

The interface should include:

Indicators or icons representing the position of the road dividers, such as arrows pointing left, right, or straight.

Clear labels indicating the direction of traffic flow corresponding to each divider position.

Real-time updates reflecting changes in divider position based on traffic conditions.

Additional controls or options for manual override or system configuration.

By presenting the divider position in a user-friendly interface, stakeholders can easily monitor and manage traffic flow, ensuring efficient operation of the Smart Road Divider system.

This user interface enhances the usability and accessibility of the system, facilitating effective traffic management and congestion reduction efforts.

Conclusion:

In conclusion, the development of the Smart Road Divider system represents a significant advancement in traffic management technology aimed at alleviating congestion and improving road efficiency in urban environments. Through the integration of IoT technologies, including infrared sensors, motor drivers, and microcontrollers, the system autonomously adapts divider positions based on real-time traffic conditions. The results obtained from testing and validation demonstrate the effectiveness of the system in dynamically reallocating lanes to optimize traffic flow and reduce congestion.

References

- [1] K. Vidhya, A. Bazila Banu, "Density Based Traffic Signal System," in Volume 3, Special Issue 3, March 2014.
- [2] P. Khanke and P. S. Kulkarni, "A Technique on Road Tranc Analysis using Image Processing," in Vol. 3 Issue 2, February 2014.
- [3] R. Sundar, S. Hebbar, and V. Golla, "Implementing intelligent Traffic Control System for Congestion Control, Ambulance Clearance, and Stolen Vehicle Detection," in IEEE Sensors Journal, vol. 15, no. 2, pp. 2015.
- [4] P. Choudekar, S. Banerjee, and M. K. Muju, "Real Time Traffic Light Control Using Image Processing," in Vol. 2, No. March.
- [5] S. Bhusari, "Traffic control system using Raspberry-pi," in Global Journal of Advanced Engineering Technologies, vol. 4, issue 4, pp. 413-415, March 2015.
- [6] S. Lokesh, "An Adaptive Traffic Control System Using Raspberry PI," in International Journal of Engineering Sciences & Research Technology, IEEE conference, June 2014, pp. 831-835.
- [7] S. Djahel, "Reducing Emergency Services Response Time in Smart Cities: An Advanced Adaptive & Fuzzy Approach," in IEEE, 2015, pp. 978-986.
- [8] G. Kiokes, "Development of an Integrated Wireless Communication System for Connecting Electric Vehicles to the Power Grid," in IEEE conf., 2015, pp. 296-301.
- [9] Movable Traffic Divider: A Congestion Release Strategy, 2017, vol. 5, issue 1.

[10] A. G. Chaudry, "Evolution Of Transportation System In Dubai," in National Industries Quarterly, vol. 14, 2012.

Author's Profiles



VENKATESWARA REDDY.P. is working as an assistant professor in the Department of CSE-IoT at Visvodaya Engineering College, Kavali. He completed his B.Tech. in Computer Science and Engineering from Priyadharshini College of Engineering, Sullurpeta, and his M.Tech. in Computer Science and Engineering from PBR Visvodaya Institute of Technology and Science, Kavali. He has 15 years of teaching experience at various engineering colleges.



P.Divya B.Tech with Specialization of Computer Science and Engineering in Visvodaya Engineering College, Kavali.



P. Poojitha B. Tech with Specialization of Computer Science and Engineering in Visvodaya Engineering College, Kavali.



D.Naga Akash B. Tech with Specialization of Computer Science and Engineering in Visvodaya Engineering College, Kavali.



P. Kishan Kumar B.Tech with Specialization of Computer Science and Engineering in Visvodaya Engineering College, Kavali.



Y.Uday Chandra B.Tech with Specialization
of Computer Science and Engineering in
Visvodaya Engineering College, Kavali.