

# Securing Cloud Data under Key Exposure

*Ponnala Ramya Sri, Sri.G.Ramesh Kumar, Sri.V.Bhaskara Murthy*

*MCA Student, Assistant Professor, Associate Professor*

*Dept Of MCA*

*B.V.Raju College, Bhimavaram*

## ABSTRACT

Recent news reveal a powerful attacker which breaks data confidentiality by acquiring cryptographic keys, by means of coercion or backdoors in cryptographic software. Once the encryption key is exposed, the only viable measure to preserve data confidentiality is to limit the attacker's access to the ciphertext. This may be achieved, for example, by spreading ciphertext blocks across servers in multiple administrative domains—thus assuming that the adversary cannot compromise all of them. Nevertheless, if data is encrypted with existing schemes, an adversary equipped with the encryption key, can still compromise a single server and decrypt the ciphertext blocks stored therein. In this paper, we study data confidentiality against an adversary which knows the encryption key and has access to a large fraction of the ciphertext blocks. To this end, we propose Bastion, a novel and efficient scheme that guarantees data confidentiality even if the encryption key is leaked and the adversary has access to almost all ciphertext blocks. We analyze the security of Bastion, and we evaluate its performance by means of a prototype implementation. We also discuss practical insights with respect to the integration of Bastion in commercial dispersed storage systems. Our evaluation results suggest that Bastion is well-suited for integration in existing systems since it incurs less than 5% overhead compared to existing semantically secure encryption modes.

Key Words: Key exposure, data confidentiality, dispersed storage.

## I. INTRODUCTION

The world recently witnessed a massive surveillance program aimed at breaking users' privacy. Perpetrators were not hindered by the various security measures deployed within the targeted services. For instance, although these services relied on encryption mechanisms to guarantee data confidentiality, the necessary keying material was acquired by means of backdoors, bribe, or coercion. If the encryption key is exposed, the only viable means to guarantee confidentiality is to limit the adversary's access to the ciphertext, e.g., by spreading it across multiple administrative domains, in the hope that the adversary cannot compromise all of them. However, even if the data is encrypted and dispersed across different administrative domains, an adversary equipped with the appropriate keying material can compromise a server in one domain and decrypt ciphertext blocks stored therein. In this paper, we study data confidentiality against an adversary which knows the encryption key and has access to a large fraction of the ciphertext blocks. The adversary can acquire the key either by exploiting flaws or backdoors in the key-generation software, or by compromising the devices that store the keys (e.g., at the user-side or in the cloud). As far as we are aware, this adversary invalidates the security of most cryptographic solutions, including those that protect encryption keys by means of secret-sharing (since these keys can be leaked as soon

as they are generated). To counter such an adversary, we propose Bastion, a novel and efficient scheme which ensures that plaintext data cannot be recovered as long as the adversary has access to at most all but two ciphertext blocks, even when the encryption key is exposed. Bastion achieves this by combining the use of standard encryption functions with an efficient linear transform. In this sense, Bastion shares similarities with the notion of all-or-nothing transform. An AONT is not an encryption by itself, but can be used as a pre-processing step before encrypting the data with a block cipher. This encryption paradigm—called AON encryption—was mainly intended to slow down brute-force attacks on the encryption key. However, AON encryption can also preserve data confidentiality in case the encryption key is exposed, as long as the adversary has access to at most all but one ciphertext blocks. Existing AON encryption schemes, however, require at least two rounds of block cipher encryptions on the data: one preprocessing round to create the AONT, followed by another round for the actual encryption. Notice that these rounds are sequential, and cannot be parallelized. This results in considerable—often unacceptable—overhead to encrypt and decrypt large files. On the other hand, Bastion requires only one round of encryption—which makes it well-suited to be integrated in existing dispersed storage systems. We evaluate the performance of Bastion in comparison with a number of existing encryption schemes. Our results show that Bastion only incurs a negligible performance deterioration (less than 5%) when compared to symmetric encryption schemes, and considerably improves the performance of existing AON encryption schemes. We also discuss practical insights with respect to the possible integration of Bastion in commercial dispersed storage systems. Our contributions in this paper can be summarized as follows:

- A new scheme is proposed called Bastion, an efficient scheme which ensures data confidentiality against an adversary that knows the encryption key and has access to a large fraction of the ciphertext blocks
- The security of Bastion is analyzed, it prevents leakage of any plaintext block as long as the adversary has access to the encryption key and to all but two ciphertext blocks.

## II. LITERATURE SURVEY

### “Secret-Sharing Schemes: A Survey,”

**AUTHORS:** A. Beimel,

A secret-sharing scheme is a method by which a dealer distributes shares to parties such that only authorized subsets of parties can reconstruct the secret. Secret-sharing schemes are important tools in cryptography and they are used as a building box in many secure protocols, e.g., general protocol for multiparty computation, Byzantine agreement, threshold cryptography, access control, attribute-based encryption, and generalized oblivious transfer. In this survey, we will describe the most important constructions of secret-sharing schemes, explaining the connections between secret-sharing schemes and monotone formulae and monotone span programs. The main problem with known secret-sharing schemes is the large share size: it is exponential in the number of parties. We conjecture that this is unavoidable. We will discuss the known lower bounds on the share size. These lower bounds are fairly weak and there is a big gap between the lower and upper bounds. For linear secret-sharing schemes, which is a class of schemes based on linear algebra that contains most known schemes, super-polynomial lower bounds on the share size are known. We will describe the proofs of these lower bounds. We will also present two results connecting secret-sharing schemes for a

Hamiltonian access structure to the NP vs. coNP problem and to a major open problem in cryptography – constructing oblivious-transfer protocols from one-way functions

### Using Erasure Codes Efficiently for Storage in a Distributed System,”

**AUTHORS:** M. K. Aguilera, R. Janakiraman, and L. Xu

Erasure codes provide space-optimal data redundancy to protect against data loss. A common use is to reliably store data in a distributed system, where erasure-coded data are kept in different nodes to tolerate node failures without losing data. In this paper, we propose a new approach to maintain ensure-encoded data in a distributed system. The approach allows the use of space efficient k-of-n erasure codes where n and k are large and the overhead n-k is small. Concurrent updates and accesses to data are highly optimized: in common cases, they require no locks, no two-phase commits, and no logs of old versions of data. We evaluate our approach using an implementation and simulations for larger systems.

### III.EXISTING SYSTEM


Cloud Computing is an internet-based computing which helps users share the files online by using internet. People place lots of information in the cloud. The data which is placed in the cloud will have no physical possession by the users. Hence, cloud security becomes important for keeping the file safe in the cloud. Securing cloud data from unknown threats is a complicated as well as challenging task. This makes the data protection in cloud a major problem. This paper ensures the integrity of the cloud data and security of the data stored in the cloud. In this paper, the data is stamped before uploading it to cloud. By using cloud services, users can gain access to their file

remotely and can download it without having the need for storing data locally in the drives. Cloud computing ensures the integrity of the cloud data. Enabling the public auditability is of great need for users to be free from worries. The Third part auditors will check the integrity of the data and help the users for storing their data in the cloud happily. The Third-Party Auditors will bring no extra burden for the system and therefore helps for securing the data in the cloud at no additional cost. Analysis of the proposed system shows that the proposed system is not only intelligent but also secure and efficient.

### IV.PROPOSED SYSTEM

In this paper, we study data confidentiality against an adversary which knows the encryption key and has access to a large fraction of the ciphertext blocks. The adversary can acquire the key either by exploiting flaws or backdoors in the key-generation software, or by compromising the devices that store the keys (e.g., at the user-side or in the cloud). To counter such an adversary, we propose Bastion, a novel and efficient scheme which ensures that plaintext data cannot be recovered as long as the adversary has access to at most all but *two* ciphertext blocks, even when the encryption key is exposed.

### V.SYSTEM ARCHITECTURE

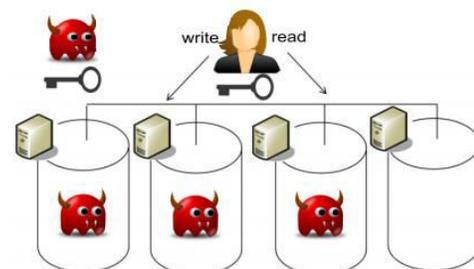

## VI. IMPLEMENTATION

### MODULES DESCRIPTION:

#### Data Owner:

In Data Owner module, Initially Data Owner must have to register their detail and admin will approve the registration by sending signature key and private key through email. After successful login he/she have to verify their login by entering signature and private key. Then data Owner can upload files into cloud server with Polynomial key generation. He/she can view the files that are uploaded in cloud by entering the secret file key.

#### Data User:

In Data User module, Initially Data Users must have to register their detail and admin will approve the registration by sending signature key and private key through email. After successful login he/she have to verify their login by entering signature and private key. Data Users can search all the files upload by data owners. He/she can send search request to admin then admin will send the search key. After entering the search key he/she can view the file

#### Admin:

In Admin module, Admin can view all the Data owners and data user's details. Admin will approve the users and send the signature key and private key to the data owners and data users. Also admin will send the search request key to the users. Admin can able see the files in cloud uploaded by the data owners.

## VII.CONCLUSION

In this paper, we addressed the problem of securing data outsourced to the cloud against an adversary which has access to the encryption

key. For that purpose, we introduced a novel security definition that captures data confidentiality against the new adversary. We then proposed Bastion, a scheme which ensures the confidentiality of encrypted data even when the adversary has the encryption key, and all but *two* ciphertext blocks. Bastion is most suitable for settings where the ciphertext blocks are stored in multi-cloud storage systems. In these settings, the adversary would need to acquire the encryption key, and to compromise *all* servers, in order to recover any single block of plaintext. We analyzed the security of Bastion and evaluated its performance in realistic settings. Bastion considerably improves (by more than 50%) the performance of existing primitives which offer comparable security under key exposure, and only incurs a negligible overhead (less than 5%) when compared to existing semantically secure encryption modes (e.g., the CTR encryption mode). Finally, we showed how Bastion can be practically integrated within existing dispersed storage systems.

## REFERENCES

- [1] M. Abd-El-Malek, G. R. Ganger, G. R. Goodson, M. K. Reiter, and J. J. Wylie, "Fault-Scalable Byzantine Fault-Tolerant Services," in ACM Symposium on Operating Systems Principles (SOSP), 2005, pp. 59–74.
- [2] M. K. Aguilera, R. Janakiraman, and L. Xu, "Using Erasure Codes Efficiently for Storage in a Distributed System," in International Conference on Dependable Systems and Networks (DSN), 2005, pp. 336–345.
- [3] W. Aiello, M. Bellare, G. D. Crescenzo, and R. Venkatesan, "Security amplification by composition: The case of doublyiterated, ideal ciphers," in Advances in Cryptology (CRYPTO), 1998, pp. 390–407.

[4] C. Basescu, C. Cachin, I. Eyal, R. Haas, and M. Vukolic, “Robust Data Sharing with Key-value Stores,” in ACM SIGACTSIGOPS Symposium on Principles of Distributed Computing (PODC), 2011, pp. 221–222.

[5] A. Beimel, “Secret-sharing schemes: A survey,” in International Workshop on Coding and Cryptology (IWCC), 2011, pp. 11–46.

[6] A. Bessani, M. Correia, B. Quaresma, F. André, and P. Sousa, “DepSky: Dependable and Secure Storage in a Cloud-ofclouds,” in Sixth Conference on Computer Systems (EuroSys), 2011, pp. 31–46.

[7] G. R. Blakley and C. Meadows, “Security of ramp schemes,” in Advances in Cryptology (CRYPTO), 1984, pp. 242–268.

[8] V. Boyko, “On the Security Properties of OAEP as an All-or-nothing Transform,” in Advances in Cryptology (CRYPTO), 1999, pp. 503–518.

[9] R. Canetti, C. Dwork, M. Naor, and R. Ostrovsky, “Deniable Encryption,” in Proceedings of CRYPTO, 1997.

[10] Cavalry, “Encryption Engine Dongle,” <http://www.cavalrystorage.com/en2010.aspx/>.

[11] C. Charnes, J. Pieprzyk, and R. Safavi-Naini, “Conditionally secure secret sharing schemes with disenrollment capability,” in ACM Conference on Computer and Communications Security (CCS), 1994, pp. 89–95.

[12] A. Desai, “The security of all-or-nothing encryption: Protecting against exhaustive key search,” in Advances in Cryptology (CRYPTO), 2000, pp. 359–375.

[13] C. Dubnicki, L. Gryz, L. Heldt, M. Kaczmarczyk, W. Kilian, P. Strzelczak, J.

Szczepkowski, C. Ungureanu, and M. Welnicki, “HYDRAsTOR: a Scalable Secondary Storage,” in USENIX Conference on File and Storage Technologies (FAST), 2009, pp. 197–210.